



HARRIS ENABLEMONITOR

COMPREHENSIVE PICTURE OF NETWORK HEALTH

KEY BENEFITS

Identifies network issues, including packet loss and latency

Customizable viewing and reporting options

Color-coded alerts and alarms indicate network status changes

Standards-based technology for enhanced interoperability, with configuration options for non-SNMP technology

Secure web access via multiple smart devices

Redundancy options for guaranteed performance

Harris EnableMonitor gives organizations a real-time picture of radio network performance and tools to quickly pinpoint issues and reduce downtime.

Users can easily customize viewing and reporting options to include system topological maps, diagrams and device listings for a comprehensive view of network health and availability of IT infrastructure. EnableMonitor represents each system element as an icon, which changes color with shifts in status, giving operators a quick way to identify problems.

Network administrators can also set up email, SMS notifications or flashing lights and sirens for rapid resolution of major issues.

Interoperability is enhanced with standards-based technology and users have secure, web-based access via multiple devices, including smart phones. EnableMonitor also includes automatic discovery to quickly identify and configure Harris-supported products.

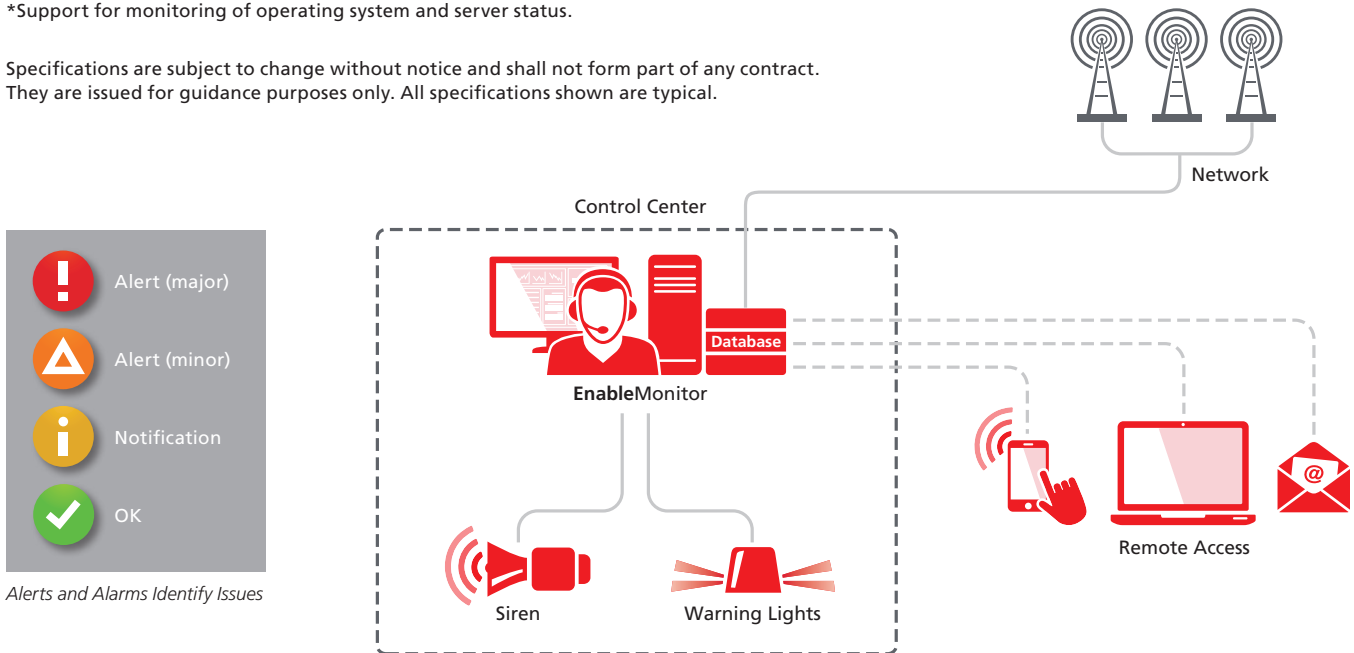
SPECIFICATIONS FOR: HARRIS ENABLEMONITOR





GENERAL

Delivery Options	EnableMonitor is delivered as a complete hardware and software solution, configured and installed for ease of use	
Minimum Hardware Requirements	Essential Architecture—one server Enterprise-class Distributed Architecture—minimum of two servers Dell® R220 Server	
Licensing Options	100 or 250	500, 1000, 2500 interfaces
Processor	2.0 GHz	Dual Core 3.5 GHz
Memory	4 GB	4 GB
Free Hard Disk Space	20 GB	40 GB
NIC	10 Mbps	100 Mbps
Video Display Resolution	1024 x 768 or higher	1024 x 768 or higher
Operating Systems Supported	Windows Server 2012 R2, Operating System 64-bit	
Recommended Browsers	IE® 11 and above Firefox® 18 and above Chrome™ 24 and above	
Accessories	Ontrack ADU208 Control Relay	
Supported Protocols	SNMP SNMP Trap WMI Syslog	Ping/ICMP Telnet/SSH Http/https
Supported Devices	Harris TB8200, TB9100, TB9300 & TB9400 Harris TN8271, TN8291, TN9300 & TN9400* Harris TD9300 GridLink Harris EnableProtect Key Management Facility Harris EnableReport Cassidian™ Site and RFSS Controllers Spectracom SecureSync® timing unit	Zetron® ACOM consoles AVTEC Scout™ consoles Cisco® switches and routers Lantronix® switches Moxa® switches Mimomax™ NDL NetGuardian™ (420)

*Support for monitoring of operating system and server status.

Specifications are subject to change without notice and shall not form part of any contract. They are issued for guidance purposes only. All specifications shown are typical.



-  Alert (major)
-  Alert (minor)
-  Notification
-  OK

Alerts and Alarms Identify Issues

About Harris Corporation

Harris Corporation is a leading technology innovator, solving customers’ toughest mission-critical challenges by providing solutions that connect, inform and protect. Harris supports government and commercial customers around the world.

Learn more at harris.com

Non-Export Controlled Information

Harris is a registered trademark of Harris Corporation.
© 2017 Harris Corporation 11/17 CS-PSPC DS1620A



The word "Tait" and the Tait logo are trademarks of Tait Limited.



Tait Limited facilities are certified for ISO9001:2008 (Quality Management System), ISO14001:2004 (Environmental Management System) and ISO18001:2007 (Occupational Health and Safety Management System) for aspects associated with the design, manufacture and distribution of radio communications and control equipment, systems and services. In addition, all our Regional Head Offices are certified to ISO9001:2008.